



1155 Perimeter Center West Suite 650
Sandy Springs, GA 30338

Staq Rotisserie Kit


Installation Instructions

AC-STQRTTSRKT

READ ALL INSTRUCTIONS BEFORE INSTALLING AND USING THIS APPLIANCE

Thank you for purchasing the Staq Rotisserie Kit accessory! These instructions will help you to install this kit onto your grill to add rotisserie cooking to your grilling experience.

CONTENTS

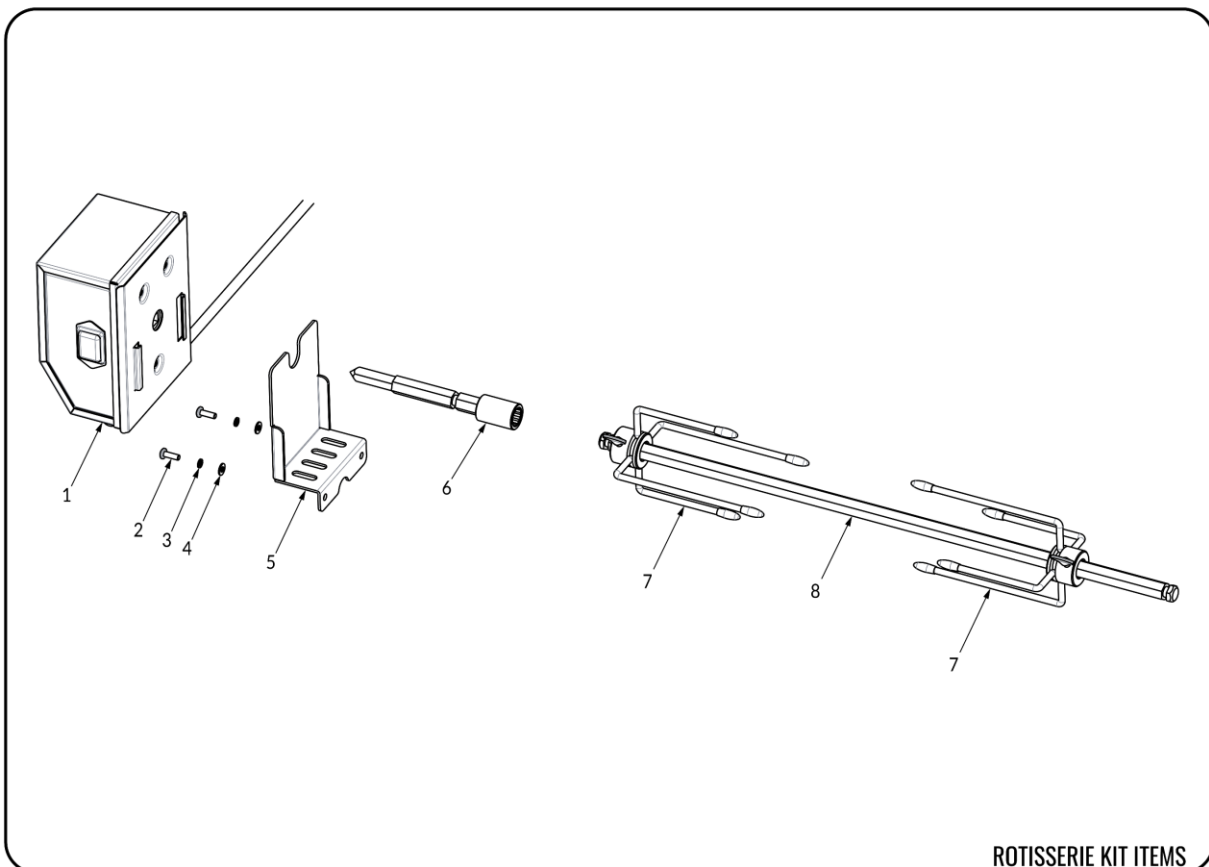

- | | |
|---------------------|---------------------------|
| 1. Rotisserie Motor | 5. Motor Bracket |
| 2. Bolt (2x) | 6. Motor Chuck |
| 3. Lock-washer (2x) | 7. Rotisserie Prongs (2x) |
| 4. Washer (2x) | 8. Rotisserie Rod |

READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE

Failure to follow these instructions could result in property damage, bodily injury, or even death. Always cook your food to USDA safe temperatures. Save these instructions for future reference.

To Contact Customer Support
(706)922-0890
Support@recteq.com

ASSEMBLY

Step 1: Unpack and Prepare for Assembly


Remove and unwrap all items from packaging

Step 2: Assemble Motor Brackets.

Install the motor bracket (item 5) with the bolts, lock-washers, and washers (items 2, 3, and 4) As shown.

Seat the rotisserie motor (item 1) on the motor bracket as shown.

**There are two locations where the rotisserie kit can be installed. Both positions are shown for clarity.*

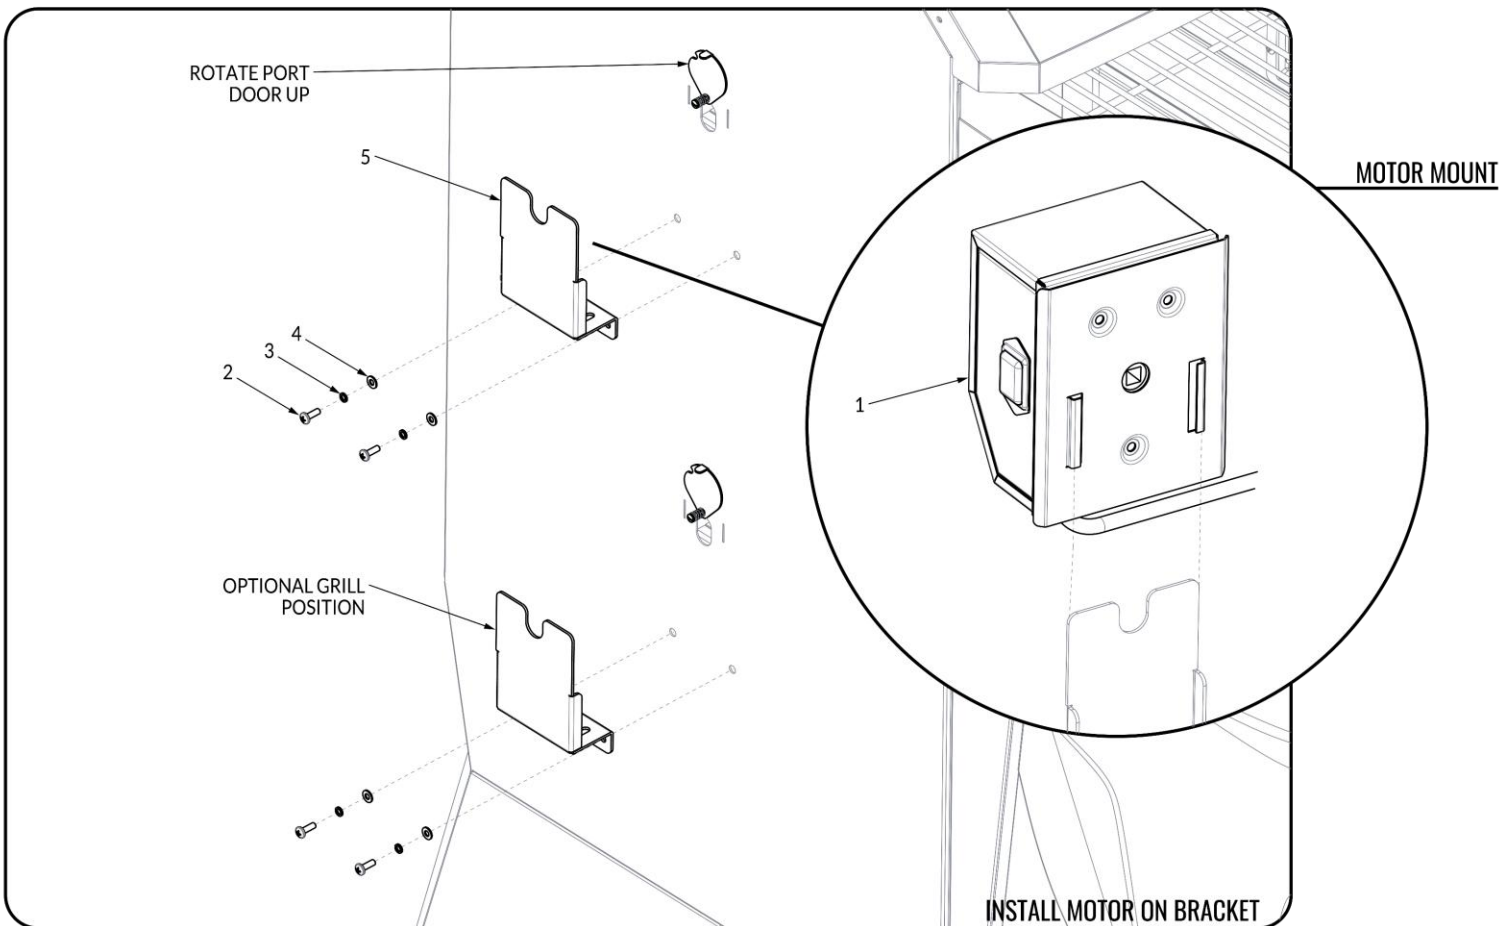


ASSEMBLY

Step 3: Assemble Motor Chuck

Insert the motor chuck (Item 6) until the groove in the motor chuck is seated in the notch in the wall opening as shown.

Ensure the end of the rod is seated in the Rotisserie Motor.

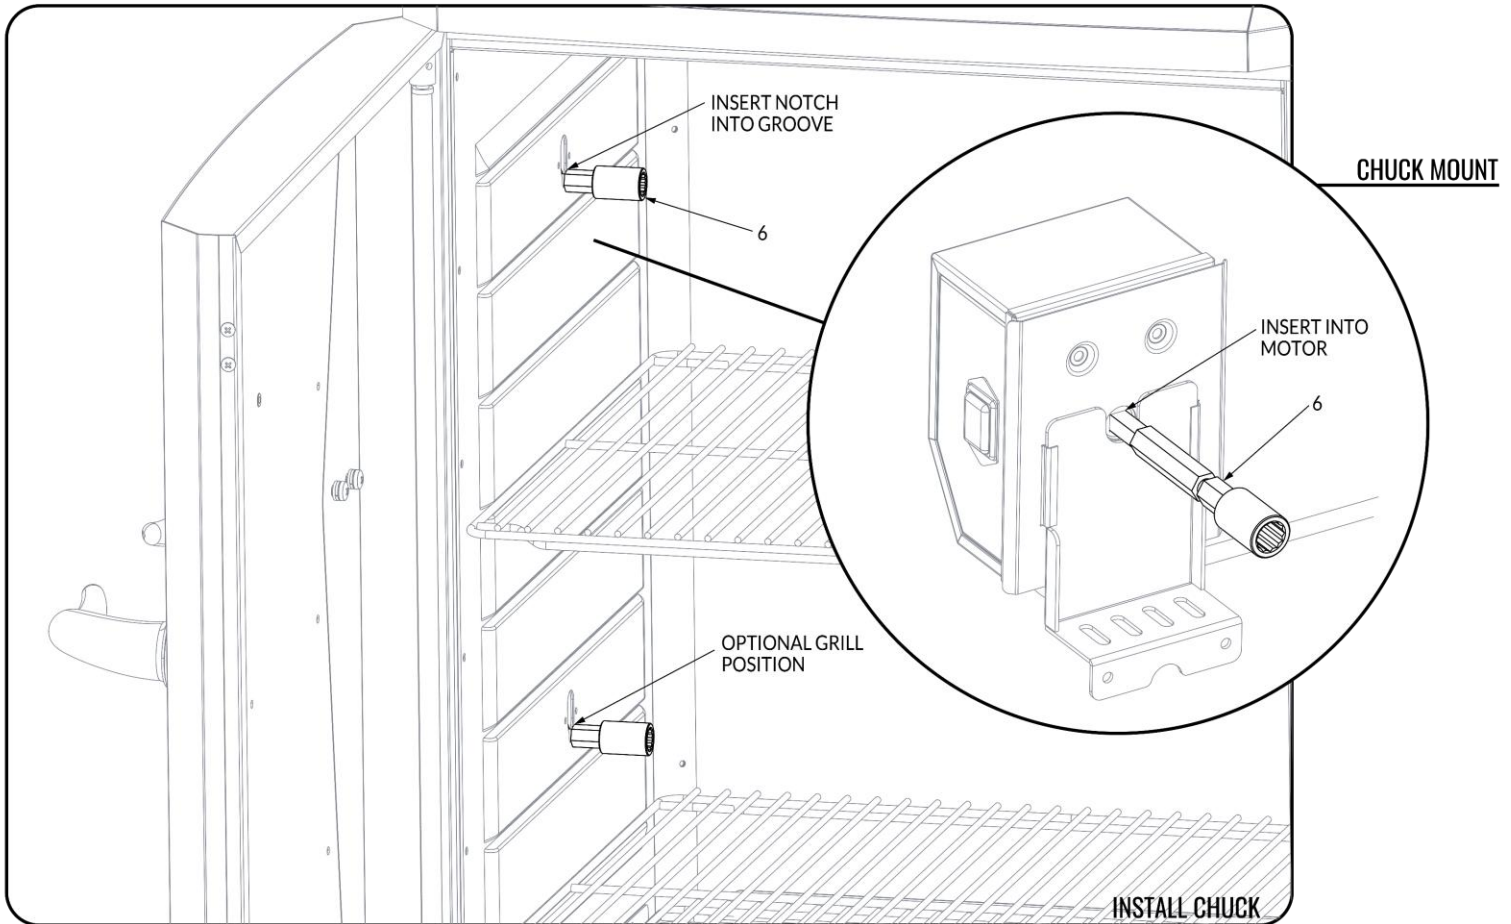


ASSEMBLY

Step 4: Assemble Rotisserie Spit Rod

Insert the rotisserie prongs (Item 7) onto the rotisserie rod (item 8) as shown.

Finger tighten the thumb screws to secure the rotisserie prongs.

* Remove the end caps from the rotisserie prongs (8 in total) either at this step or once in grill. Ensure they are removed before cooking.

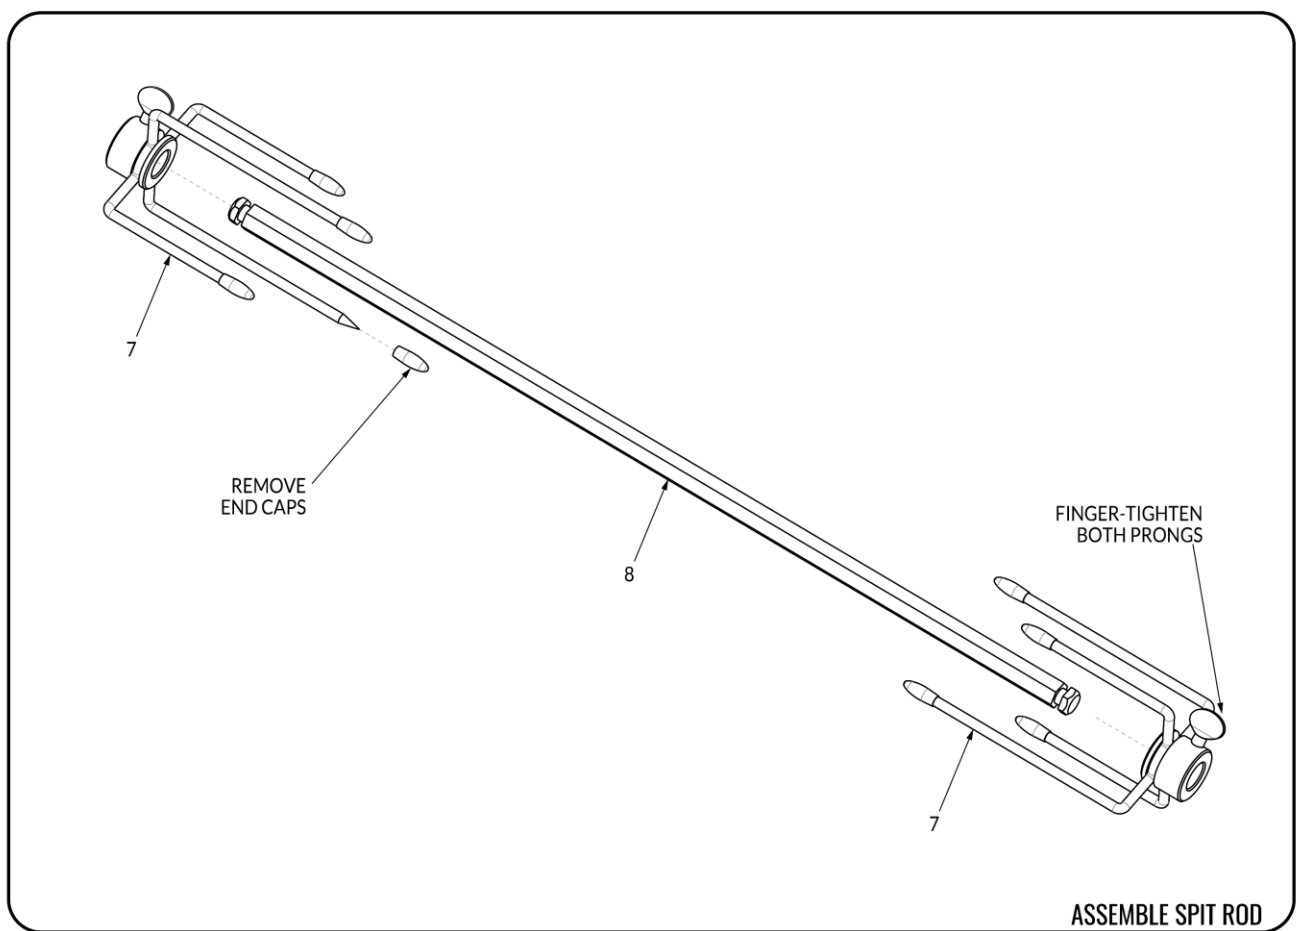


ASSEMBLY

Step 5: Install Rotisserie Spit Rod

Place one end of the rotisserie spit rod into the opening in the wall on the right-hand side of the grill interior. Ensure the groove in the rod on the right-hand side is pushed in further than the notch in the wall opening.

On the left side of the grill place the end of the rotisserie spit rod into the motor chuck (item 6).

Slide the rotisserie spit rod into position so that the groove on the right-hand side of the rotisserie spit rod is seated in the notch in the wall opening.

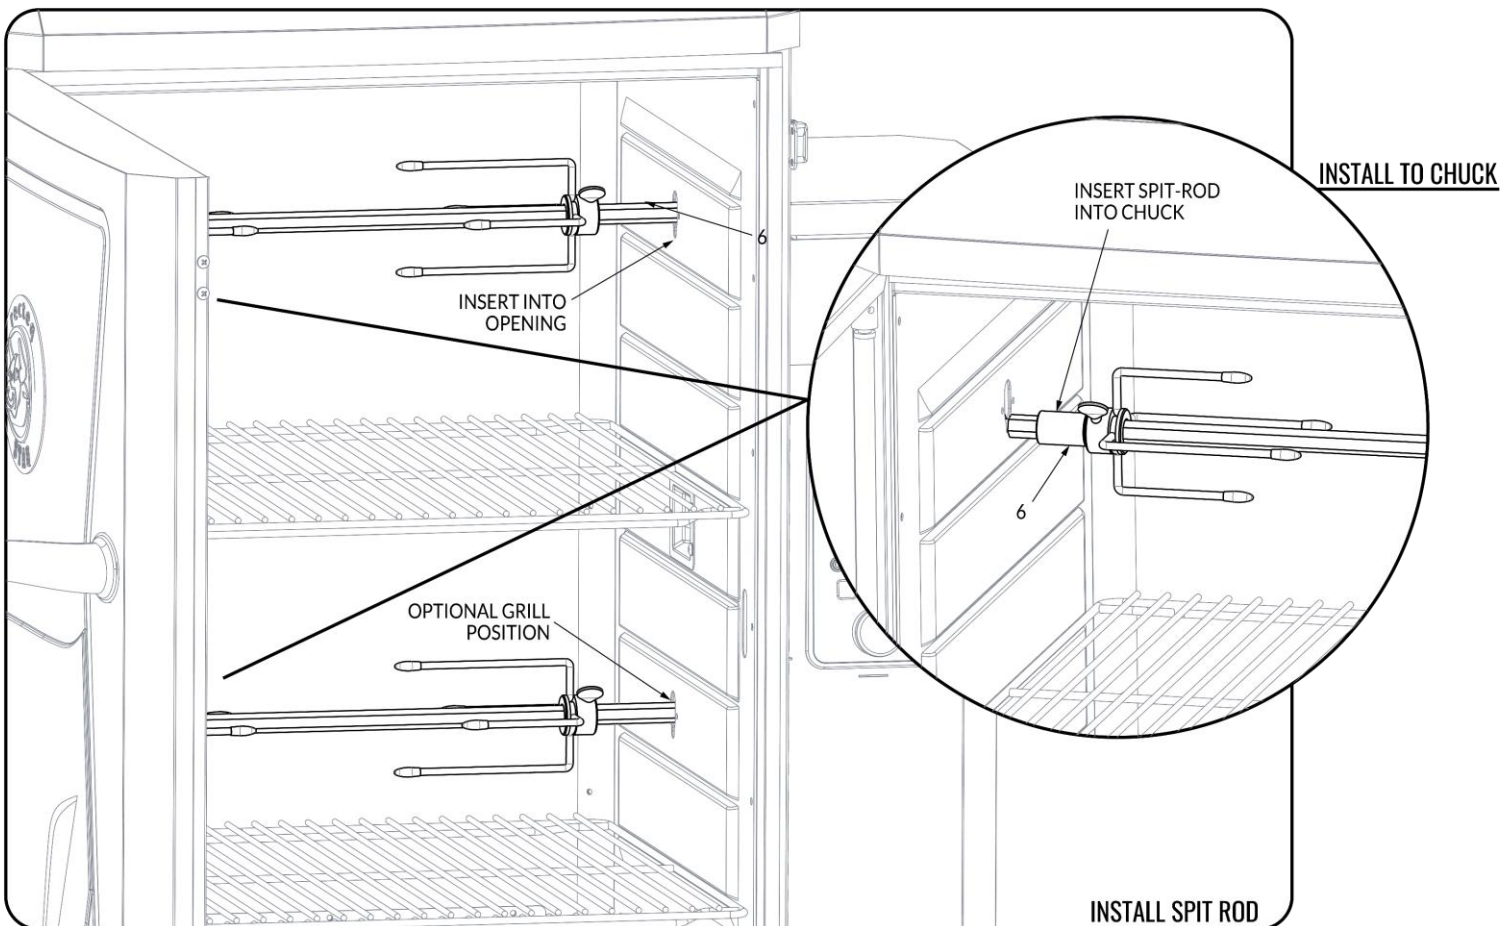

**To add a food item to the spit rod, do step 5 and 4 in reverse order.*